


BOX TP

1200 X 1000 | 9 FEET / 3 RUNNERS

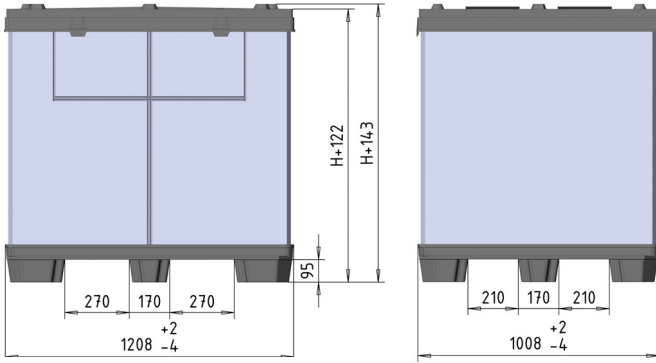

TECHNICAL DATA

MEASURES

External measures (mm)	1200 x 1000 x (H+140)
Standard internal measures (mm)	1160 x 960 x (H-70)
Sandwich internal measures (mm)	1145 x 945 x (H-70)

H = sleeve height

SLEEVE

Standard thickness (mm)	10
Standard grammage (gr/m ²)	3000
Height (mm)	<1580

WEIGHT (KG +/- 3%)

Pallet	13,3
Tapa	8,3
Faja	According to size and grammage
Patines	3,4

MATERIAL

Pallets, tapas y patines	Recycled PP
Fajas	Virgin PP (or recycled PP)

CHARACTERISTICS

STANDARD COLOR

Pallet, lid, runners	Anthracite
Sleeve	Light grey

TEMPERATURE


Temperature range (°C)	-10 to +40
------------------------	------------

LOAD CAPACITIES (with standard grammage)

Dynamic load** (kg)	800
Load in rack***(kg) with runners	400

STATIC LOAD* CAPACITY (IN STACKING)

MAX. 1200 kg *



(*) We recommend use of skids.

OPTIONS ON PALLETS AND LIDS

- Handles on lids

- Runners for use on conveyer belt or rack until 400 kg (height: +20mm)

- ESD quality

- Marking

OPTIONS ON SLEEVES

- Unloading flap standard size (800 x 350mm)

- Document holder

- Printing

- Sandwich system with return collar (H: 160mm)

- Sleeve's grammage 2000, 2500, 3000, 3500 or 4000gr/m2

PACKAGING

- Packaging unit for pallets and lids 18 + 18

- Bulk size (mm) 1200 x 1000 x 2400

- Packaging unit for sleeves subject to project


- Bulk size (mm) subject to project

- Packaging unit for runners 60

- Bulk size (mm) 1200 x 1200 x 800


EXAMPLES FOR RETURN SYSTEM

STANDARD SYSTEM

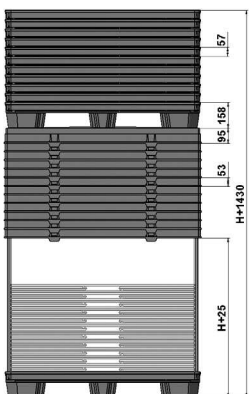


Empty returning: 12 BOX TP
 11 sleeves folded into the BOX
 Ratio= 1:4 (loaded with 1+2)
 1:6 (loaded with 1+1)


SANDWICH SYSTEM

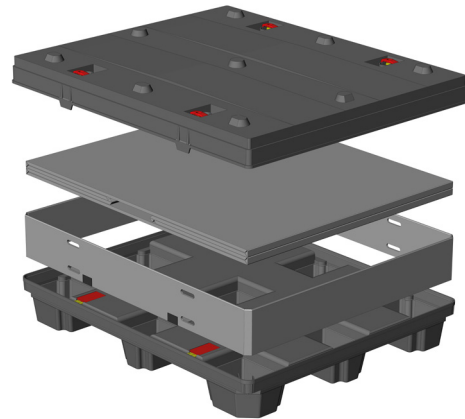


STANDARD DELIVERY



IN SANDWICH SYSTEM



SANDWICH SYSTEM

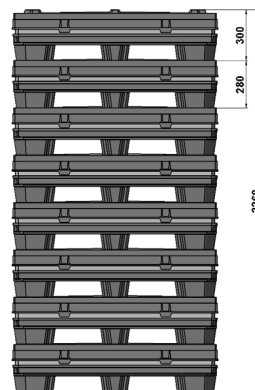

Empty returning: 8 BOX TP
 1 sleeve folded into the BOX
 Ratio= 3:8 (loaded with 1+2)
 1:4 (loaded with 1+1)

* **Static load:** Uniformly distributed load which the pallet can support when placed on a flat, horizontal rigid surface, at a temperature of approximately 20°C.
 ** **Dynamic load:** Uniformly distributed load which the pallet can support when transported or manoeuvred on a conventional forklift or pallet truck, at a temperature of approximately 20°C.
 ** **Load in rack:** Uniformly distributed load which the pallet can support when resting on the skids on its short side on a standard rack, at a temperature of approximately 20°C.

The indicated values are approximate and based on experience and practical cases.
 For bulk storage, consult.
 Any deterioration or different loading, temperature or storage method conditions, can cause this data to vary.
 We reserve the right to modify any information provided herein without prior notice.
We recommend testing the pallet before use.