


TP BOX

800 X 600 | 6 FEET

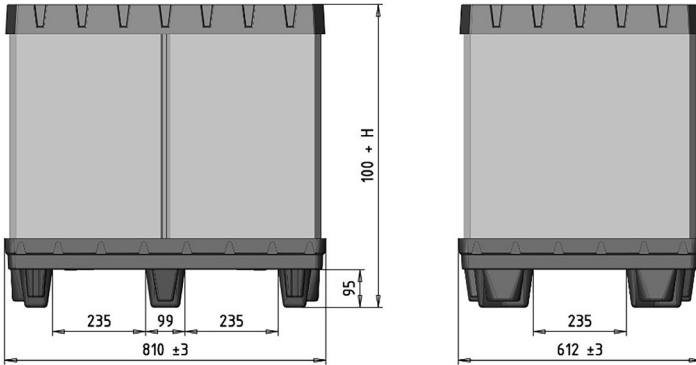

TECHNICAL DATA

MEASURES

External measures (mm)	800 x 600 x (H+105)
Standard internal measures (mm)	750 x 550 x (H-70)
Sandwich internal measures (mm)	735 x 525 x (H-70)

H = sleeve height

SLEEVE

Standard thickness (mm)	10
Standard grammage (gr/m ²)	3000
Height (mm)	<1290

WEIGHT (KG +/- 3%)

Pallet	3,7
Lid	2,8
Sleeve	According to size and grammage

MATERIAL

Pallets and lids	Recycled HDPE
Sleeves	Virgen PP (or recycled PP)

CHARACTERISTICS

STANDARD COLOR

Pallet, lid	Anthracite
Sleeve	Light grey


TEMPERATURE

Temperature range (°C)	-10 to +40
------------------------	------------

LOAD CAPACITIES (with standard grammage)

Dynamic load** (kg)	500
---------------------	-----

STATIC LOAD* CAPACITY (IN STACKING)



OPTIONS ON PALLETS AND LIDS


 ESD quality


OPTIONS ON SLEEVES

 Unloading flap


 Document holder

 Printing

 Sandwich system with return collar (H: 160mm)

 Sleeve's grammage
2000, 2500, 3000, 3500 or 4000gr/m2

PACKAGING

 Packaging unit for pallets and lids 30 + 30


 Bulk size (mm) 1200 x 800 x 1280

 Packaging unit for sleeves subject to project

 Bulk size (mm) subject to project

EXAMPLES FOR RETURN SYSTEM


STANDARD SYSTEM

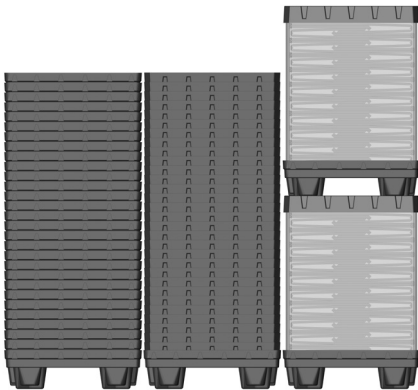


SANDWICH SYSTEM



STANDARD DELIVERY

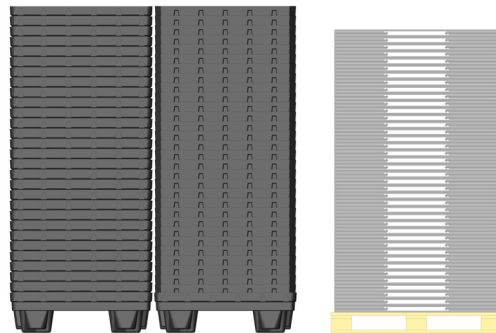

SANDWICH SYSTEM

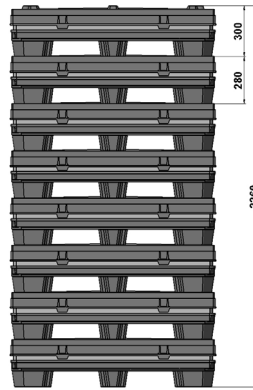

Example with BOX 1200 x 800, also valid with BOX 800 x 600.

* **Static load:** Uniformly distributed load which the pallet can support when placed on a flat, horizontal rigid surface, at a temperature of approximately 20°C.

** **Dynamic load:** Uniformly distributed load which the pallet can support when transported or manoeuvred on a conventional forklift or pallet truck, at a temperature of approximately 20°C.

The indicated values are approximate and based on experience and practical cases.

For bulk storage, consult.

Any deterioration or different loading, temperature or storage method conditions, can cause this data to vary.

We reserve the right to modify any information provided herein without prior notice.

We recommend testing the pallet before use.